



## REAR FLOOR NO.3 CROSSMEMBER (ASSY) REPLACEMENT

### 1. REMOVE REAR FLOOR NO.3 CROSSMEMBER

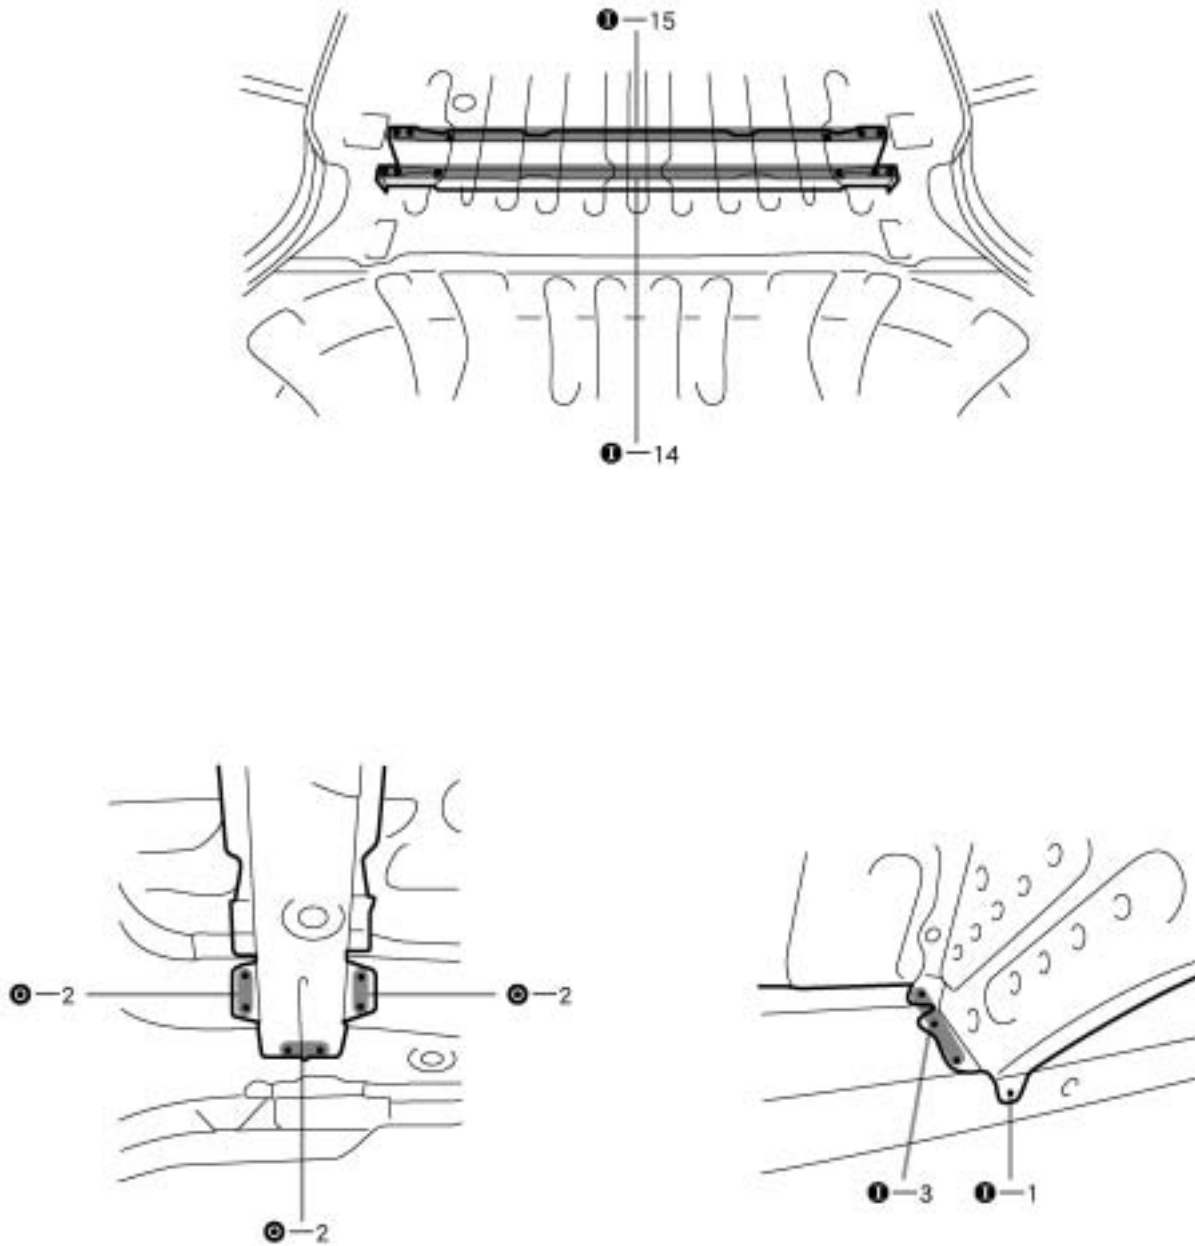

**2. INSTALL REAR FLOOR NO.3 CROSSMEMBER**

- (a) Temporarily install the new parts and measure each part in accordance with the body dimension diagram.

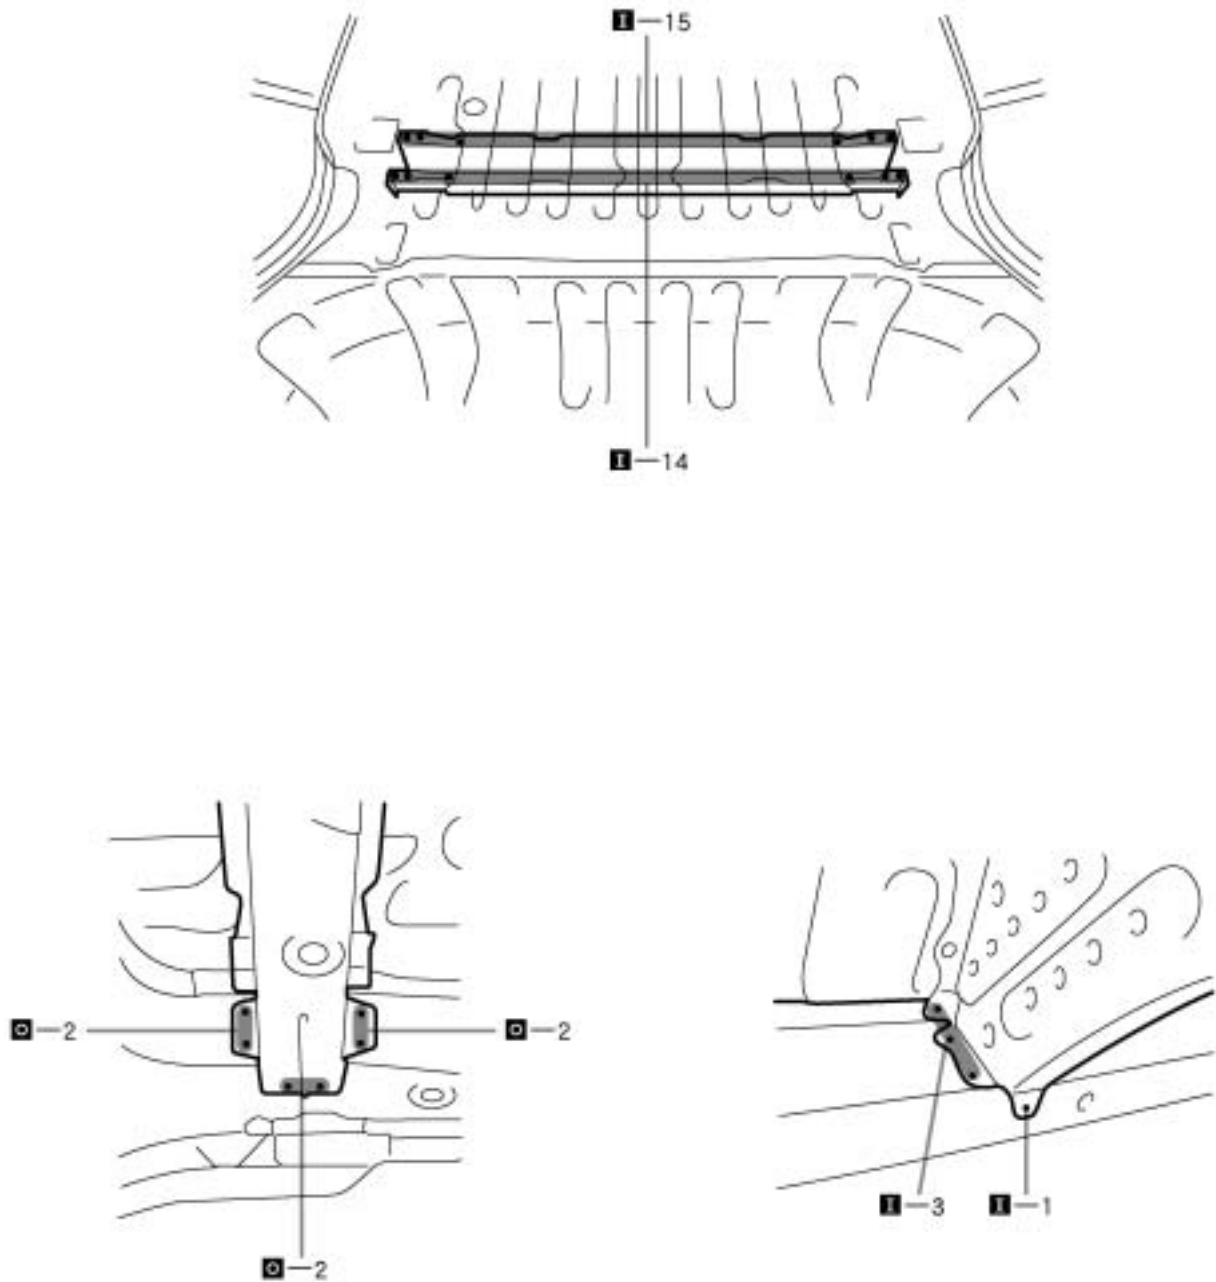

3. MEASURING THE UNDER BODY DIMENSIONS ([See page BP-94](#))
4. APPLYING SEALER TO THE REAR LUGGAGE COMPARTMENT ([See page PC-1](#))
5. APPLYING UNDER COATING ([See page PC-6](#))
6. REPLACEMENT SILENCER SHEET ([See page PC-9](#))
7. APPLYING ANTI-RUST AGENT
  - (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.