



## Technical Service BULLETIN

March 22, 2002

Title:

### GENERAL MAINTENANCE TIP

Models:


All '93 – '03 Models

ENGINE  
EG007-02

**Introduction** To help prevent unnecessary complications during the oil fill process, no undue load should be placed on the oil baffle attached to the inside of the valve cover (see illustration). This baffle is designed to deflect oil and should not be used to support the weight of heavy oil fill devices. These devices can place stress on the baffle, and bend or break it during the oil fill process.

**Applicable Vehicles** • All 1993 – 2003 model year **Toyota** vehicles.

**Oil Filling Procedure** Please take measures to ensure that the baffle is not damaged during the oil fill process. If it does become damaged, repair it before any collateral damage occurs.

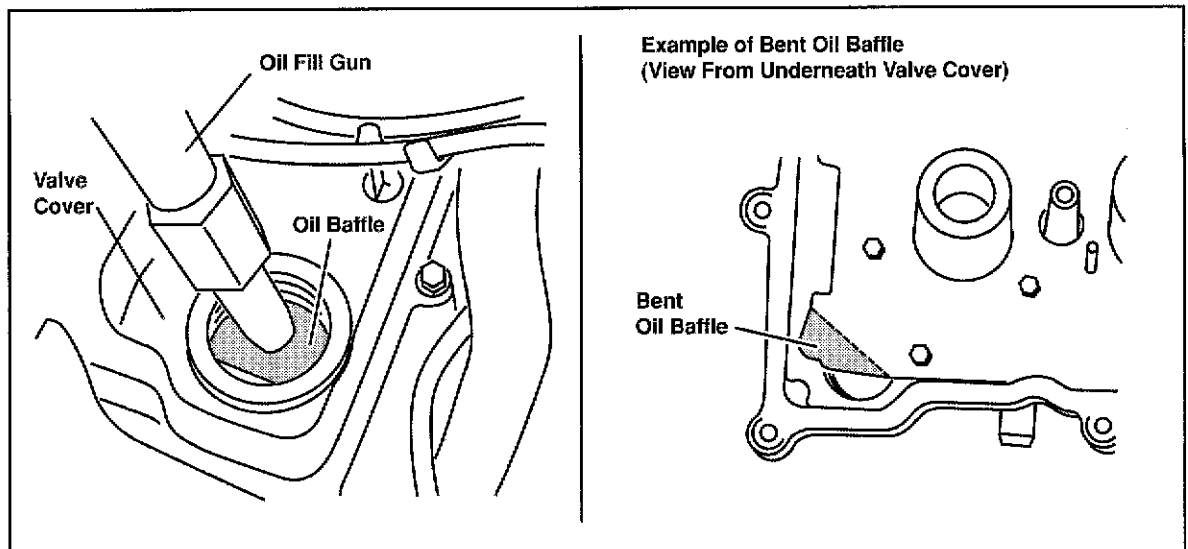

#### Warranty Information

OP CODE	DESCRIPTION	TIME	OPN	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—



Toyota Supports ASE Certification

056865

Page 1 of 1