


U241E AUTOMATIC TRANSAXLE

DESCRIPTION

- The compact and high-capacity 4-speed U241E automatic transaxle [Super ECT (Electronically Controlled Transaxle)] has been adopted.
- The ATF warmer has been newly adopted to improve fuel economy.
- The shift lock mechanism has been adopted on the models for Europe.
- The overdrive switch has been changed to the momentary type switch.
- The kick down switch has been adopted on the LHD models for Europe.

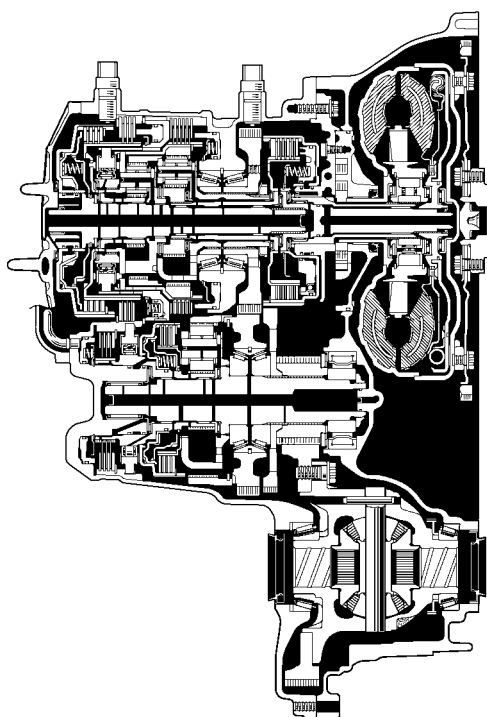

181CH09

CH

► Specifications ◀

Item		U241E
Gear Ratio*	1st	3.943
	2nd	2.197
	3rd	1.413
	4th	1.020
	Reverse	3.145
Differential Gear Ratio		3.120
Fluid Capacity	Liters (US qts, Imp. qts)	8.6 (9.1, 7.6)
Fluid Type		ATF Type T-IV
Weight (Dry)	kg	82

* : Counter Gear Ratio Included