



POWER SOURCE CIRCUIT (RADIO RECEIVER ASSY)

CIRCUIT DESCRIPTION

This circuit provides power to the radio receiver assy.

WIRING DIAGRAM

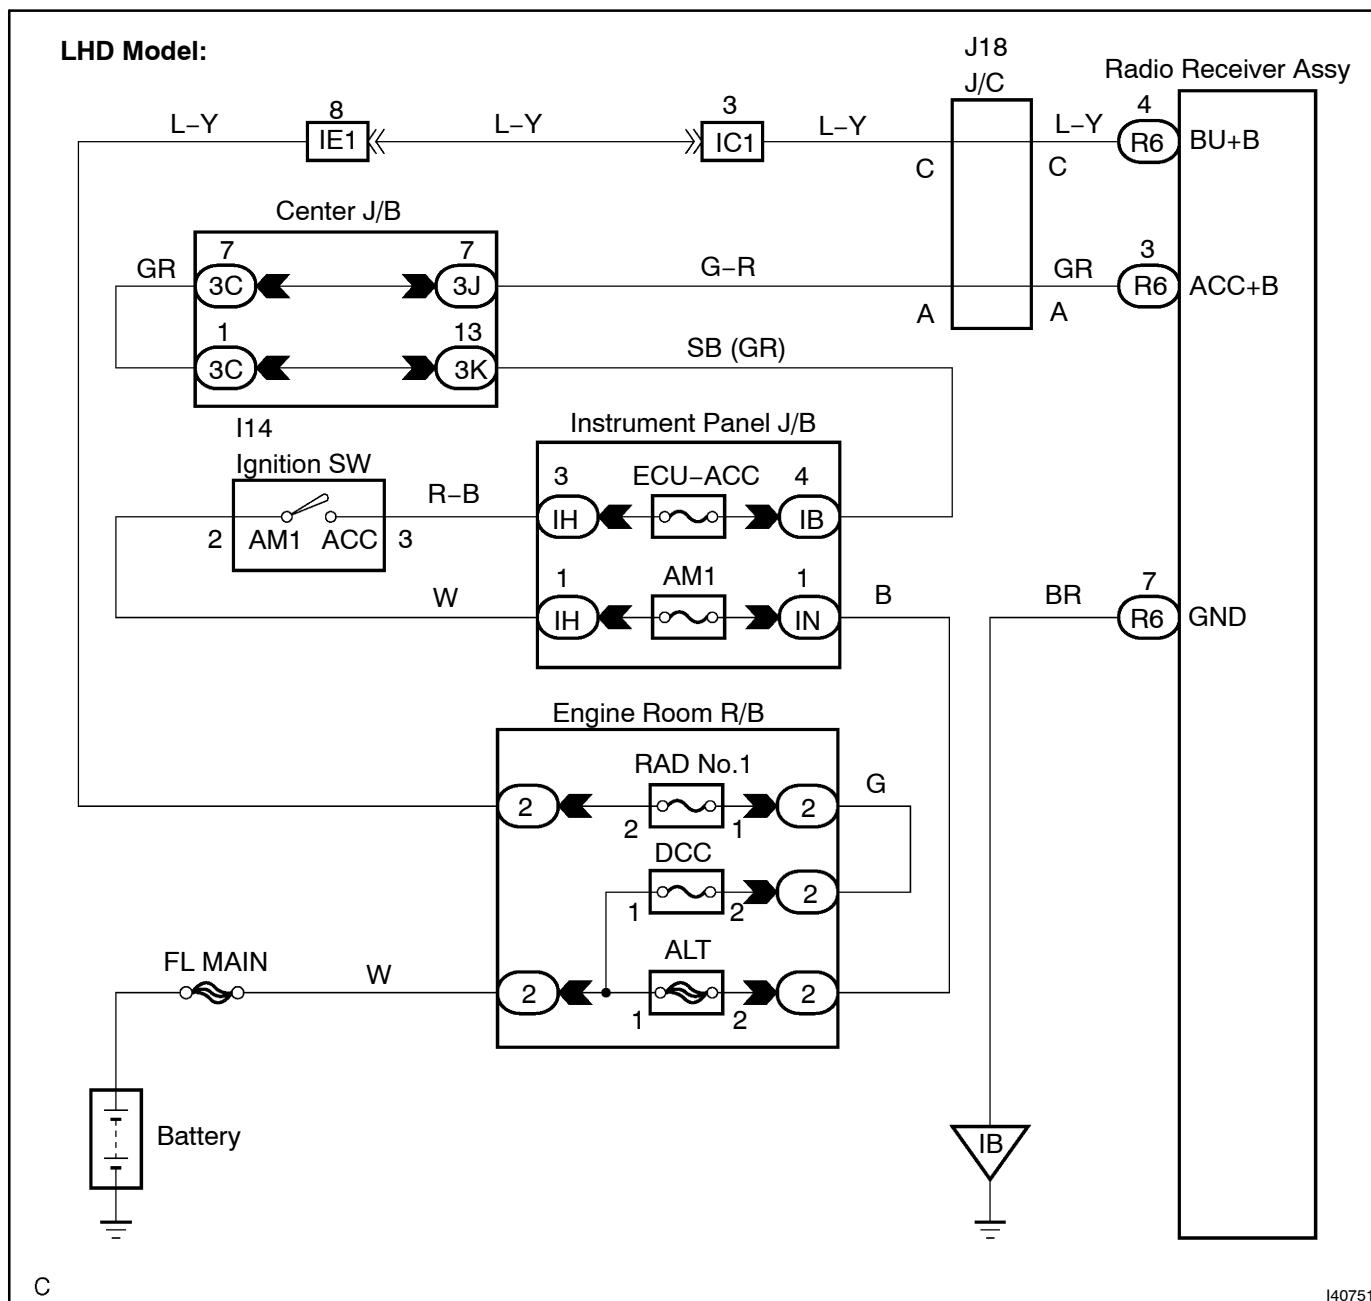

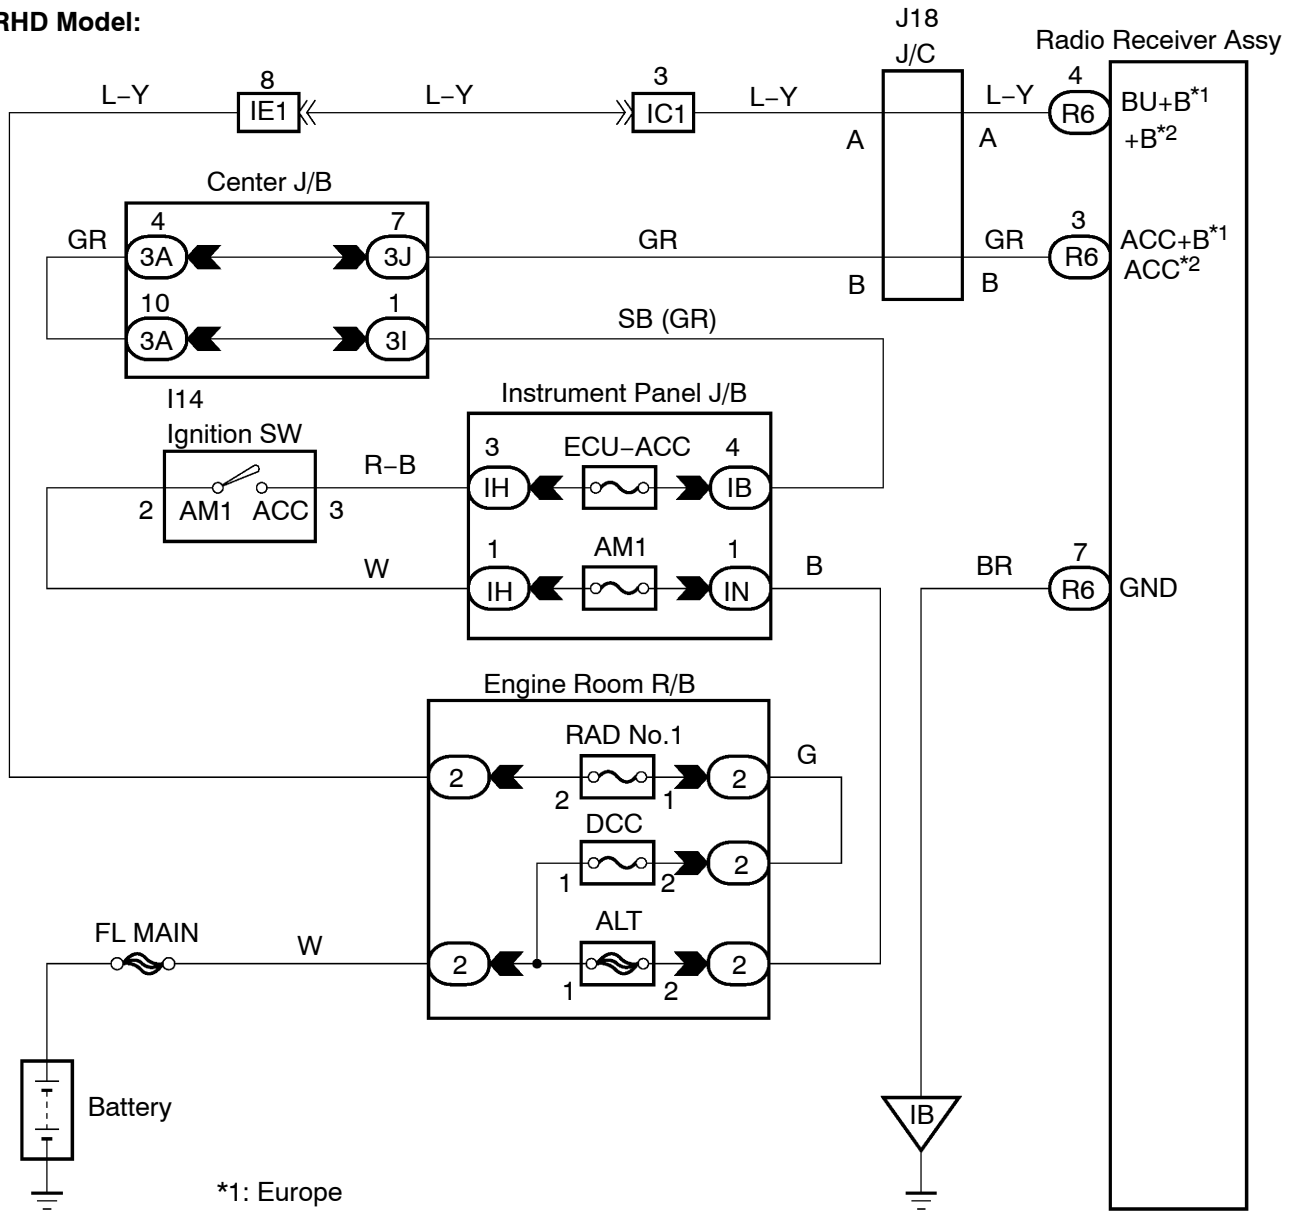
RHD Model:

C

I40751

INSPECTION PROCEDURE

1 INSPECT RADIO RECEIVER ASSY (BU+B/+B, ACC+B/ACC, GND)

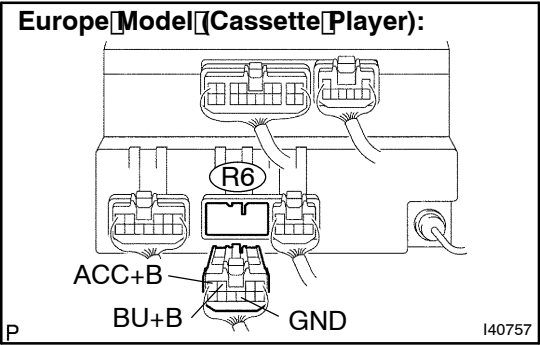

- (a) Disconnect the connector from the radio receiver assy.
(b) Measure the resistance according to the value in the table below.



Standard:

Tester connection	Condition	Specified condition
GND - Body ground	Always	Below 1 Ω

- (c) Measure the voltage according to the values in the table below.

Standard:

Tester connection	Condition	Specified condition
BU+B - GND	Always	10 to 14 V
+B - GND	Always	10 to 14 V
ACC+B - GND	Ignition SW ACC	10 to 14 V
ACC - GND	Ignition SW ACC	10 to 14 V

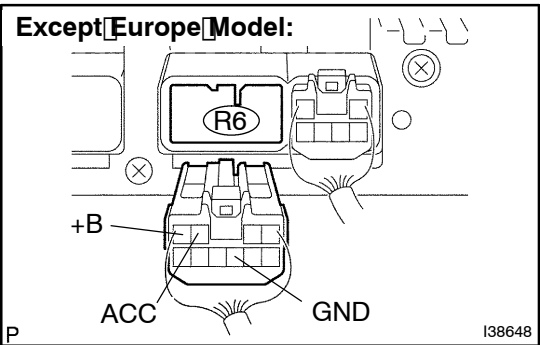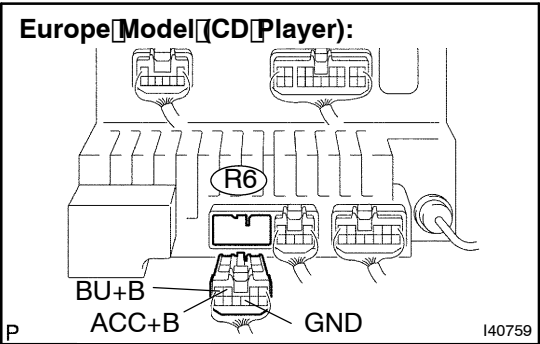

NG REPAIR OR REPLACE HARNESS OR CONNECTOR

OK

PROCEED TO NEXT CIRCUIT INSPECTION SHOWN IN PROBLEM SYMPTOMS TABLE
(SEE PAGE 05-1024)