

NAVIGATION ANTENNA ASSY REPLACEMENT

6719S-01


HINT:

Installation is in the reverse order of removal.

1. REMOVE INSTRUMENT PANEL SUB-ASSY (SEE PUB. No. RM864E, PAGE 71-10)


HINT:

Refer to the procedures up to "REMOVE INSTRUMENT PANEL SUB-ASSY".

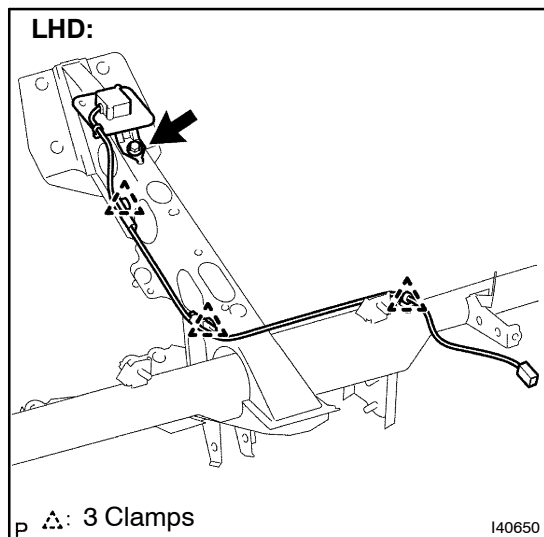

2. REMOVE NAVIGATION ANTENNA ASSY

- Disconnect the connector.
- Remove the screw and 3 clamps to remove the navigation antenna assy.

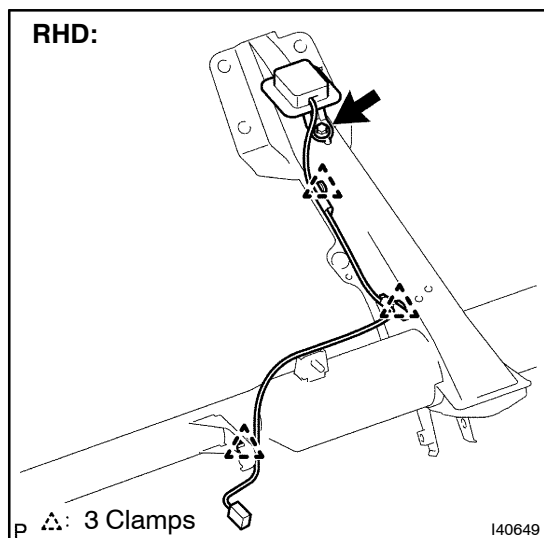

3. INSTALL INSTRUMENT PANEL SUB-ASSY (SEE PUB. No. RM864E, PAGE 71-10)

HINT:

Refer to the procedures from "INSTALL INSTRUMENT PANEL SUB-ASSY".