


REPLACEMENT

HINT:

COMPONENTS: [See page 55-95](#)

1. **REMOVE GLOVE COMPARTMENT DOOR ASSY**
([See page 71-10](#))

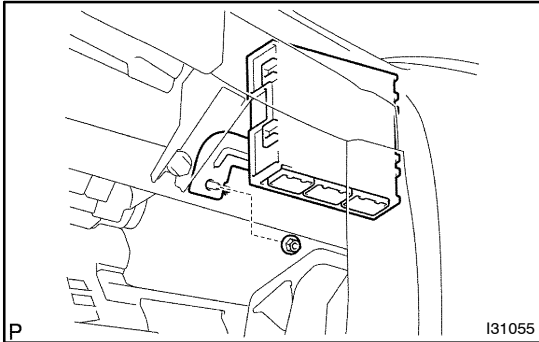

2. **REMOVE AIR CONDITIONING AMPLIFIER ASSY**

- (a) Disconnect the connectors.
- (b) Remove the nut and air conditioning amplifier assy.

3. **INSTALL AIR CONDITIONING AMPLIFIER ASSY**

- (a) Install the nut and air conditioning amplifier assy.
- (b) Connect the connector.