


REAR COMBINATION LAMP LENS & BODY LH REPLACEMENT

6509A-01

1. REMOVE DECK TRIM SIDE SERVICE HOLE COVER

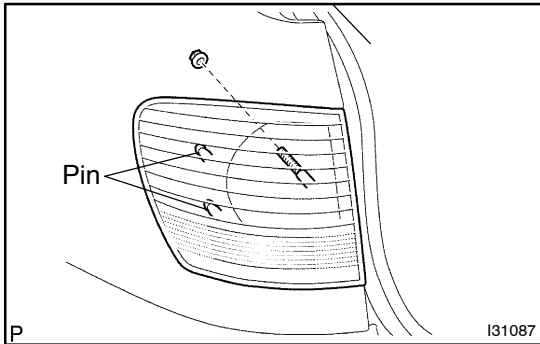

2. REMOVE REAR COMBINATION LAMP LENS & BODY LH

- (a) Disconnect the connector and remove the nut.
- (b) Pull the rear combination light assy to the back of the vehicle, and release the rear combination light assy.
- (c) Remove the 2 bulb sockets.