


POWER POINT SOCKET ASSY REPLACEMENT

67069-01

1. REMOVE QUARTER TRIM JACK COVER SUB-ASSY
(See [page 76-23](#))

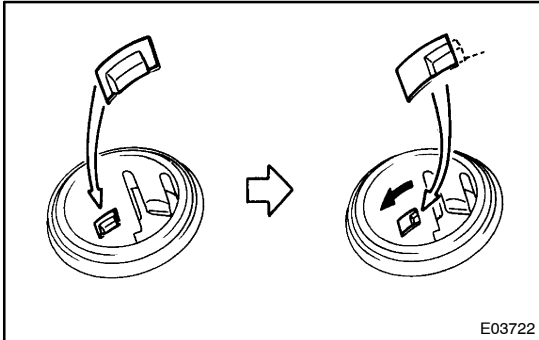

2. REMOVE POWER POINT SOCKET ASSY

- (a) Disengage the meshing of the power point socket and quarter trim jack cover sub-assy by rotating the power point socket assy.
- (b) Pull out the power point socket assy.

3. INSTALL POWER POINT SOCKET ASSY