


CIGARETTE LIGHTER ASSY REPLACEMENT

6706A-01

1. REMOVE CIGAR LIGHTER HOLE BEZEL
(See [page 71-10](#))

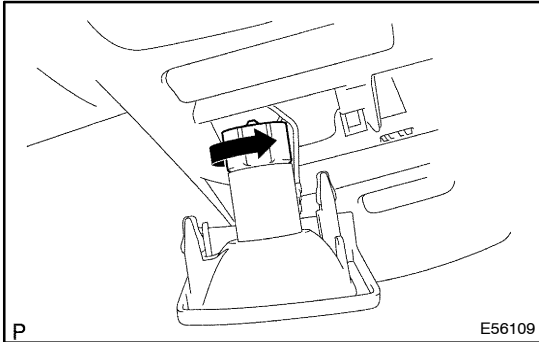

2. REMOVE CIGARETTE LIGHTER ASSY

- (a) Remove the nut from the rearward of cigar lighter hole bezel, and remove the holder part.
- (b) Push the socket part of cigarette lighter assy in to the room and remove it.

3. INSTALL CIGARETTE LIGHTER ASSY

- (a) install the socket part of cigarette lighter assy, the holder part and nat.