

TRANSMITTER BATTERY REPLACEMENT


73050-01

HINT:

Installation is in the reverse order of removal. But, the installation is indicated only when it has a point.

1. REMOVE TRANSMITTER SUB-ASSY MODULE SET DOOR CONTROL

(See page 73-20)

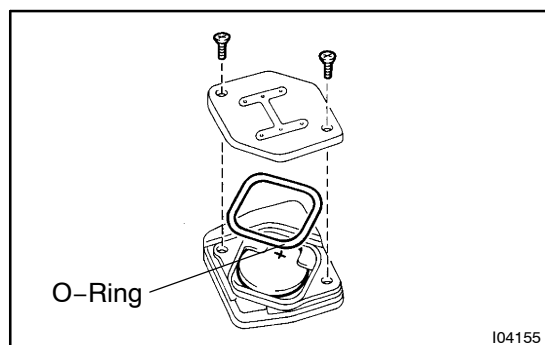


2. REMOVE TRANSMITTER BATTERY

- Using a screwdriver, remove the 2 screws and cover.
- Remove the transmitter battery (lithium battery).

NOTICE:

- Do not push the terminals with a finger.
- If prying up the battery (lithium battery) forcibly to remove it, the terminals are deformed.

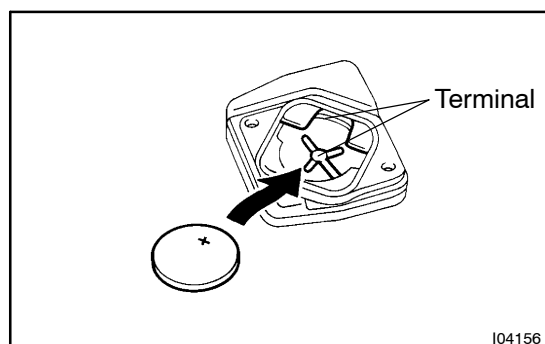

3. INSTALL TRANSMITTER BATTERY

- Install the transmitter battery (lithium battery) as shown in the illustration.

NOTICE:

Face the battery upward, take care not to deform the terminals.

- Check that O-ring is not distorted or slipped off, and install the cover.

- Using a screwdriver, tighten the 2 screws.

NOTICE:

When the screws are tightened loosely, it might cause faulty contact of battery (lithium battery) and terminals.