

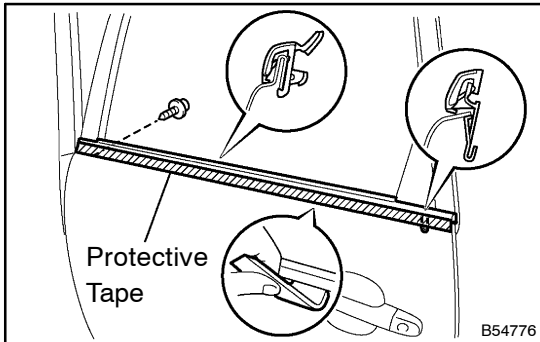
REAR DOOR BELT MOULDING LH

REPLACEMENT

7608J-01

HINT:

- Installation is in the reverse order of removal. But, the installation is indicated only when it has a point.
- In the RH side, work in the same procedure as in the LH side.

**1. REMOVE REAR DOOR BELT MOULDING LH**

- (a) Remove the screw.
- (b) Put protective tape under the rear door belt moulding LH.
- (c) Using a moulding remover or scraper, remove the rear door belt moulding LH.

HINT:

Tape the scraper tip before use.