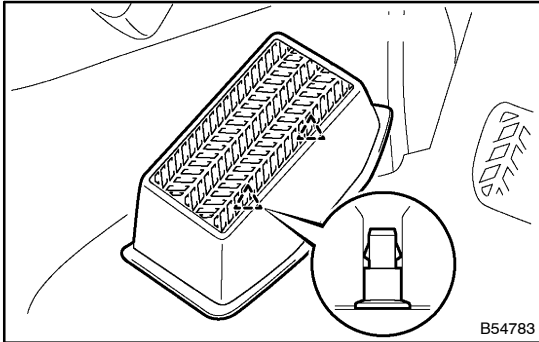


FRONT FLOOR FOOTREST REPLACEMENT

7608N-01

HINT:

Installation is in the reverse order of removal. But, the installation is indicated only when it has a point.

**1. REMOVE FRONT FLOOR FOOTREST**

- (a) Holding the footrest up by hand, disengage clip and remove the footrest.
- (b) Remove the footrest clip.

HINT:

When the footrest clip is damaged, exchange a new one.