


UNDER BODY

(Three-Dimensional Distance)

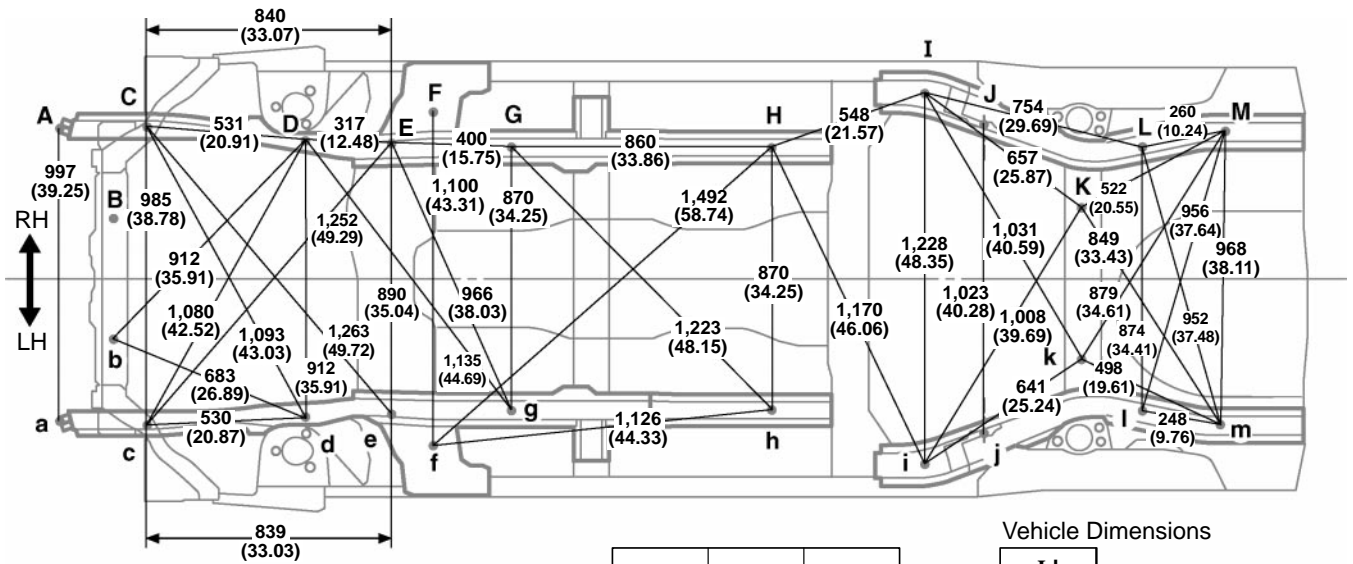


Front ←

Vehicle Dimensions

1	2	3
103 (4.06)	100 (3.94)	105 (4.13)


I-I or i-L
1,282 (50.47)

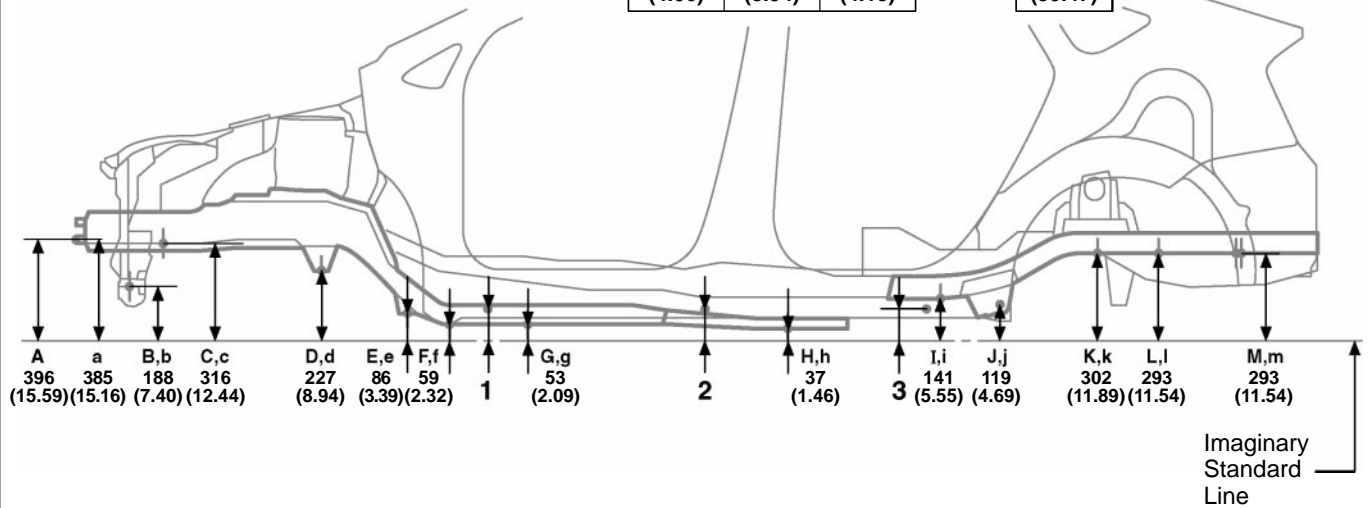

mm (in.)

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation bolt	8 (0.31) bolt	H, h	Center member floor No.5 reinforcement standard hole	10 (0.39)
B, b	Radiator lower support standard hole	10 (0.39)	I, i	Rear floor side member standard hole	25 (0.98)
C, c	Front side member standard hole	18 (0.71)	J, j	Trailing arm installation hole inner	13 (0.51)
D, d	Front suspension crossmember installation nut	14 (0.55) nut	K, k	Rear floor No.2 crossmember standard hole	10 (0.39)
E, e	Front suspension crossmember installation nut	14 (0.55) nut	L, l	Rear floor side member standard hole	16 (0.63)
F, f	Torque box front standard hole	25 (0.98)	M, m	Rear floor side member standard hole	18 (0.71)
G, g	Front side member standard hole	18 (0.71)	—	—	—

UNDER BODY

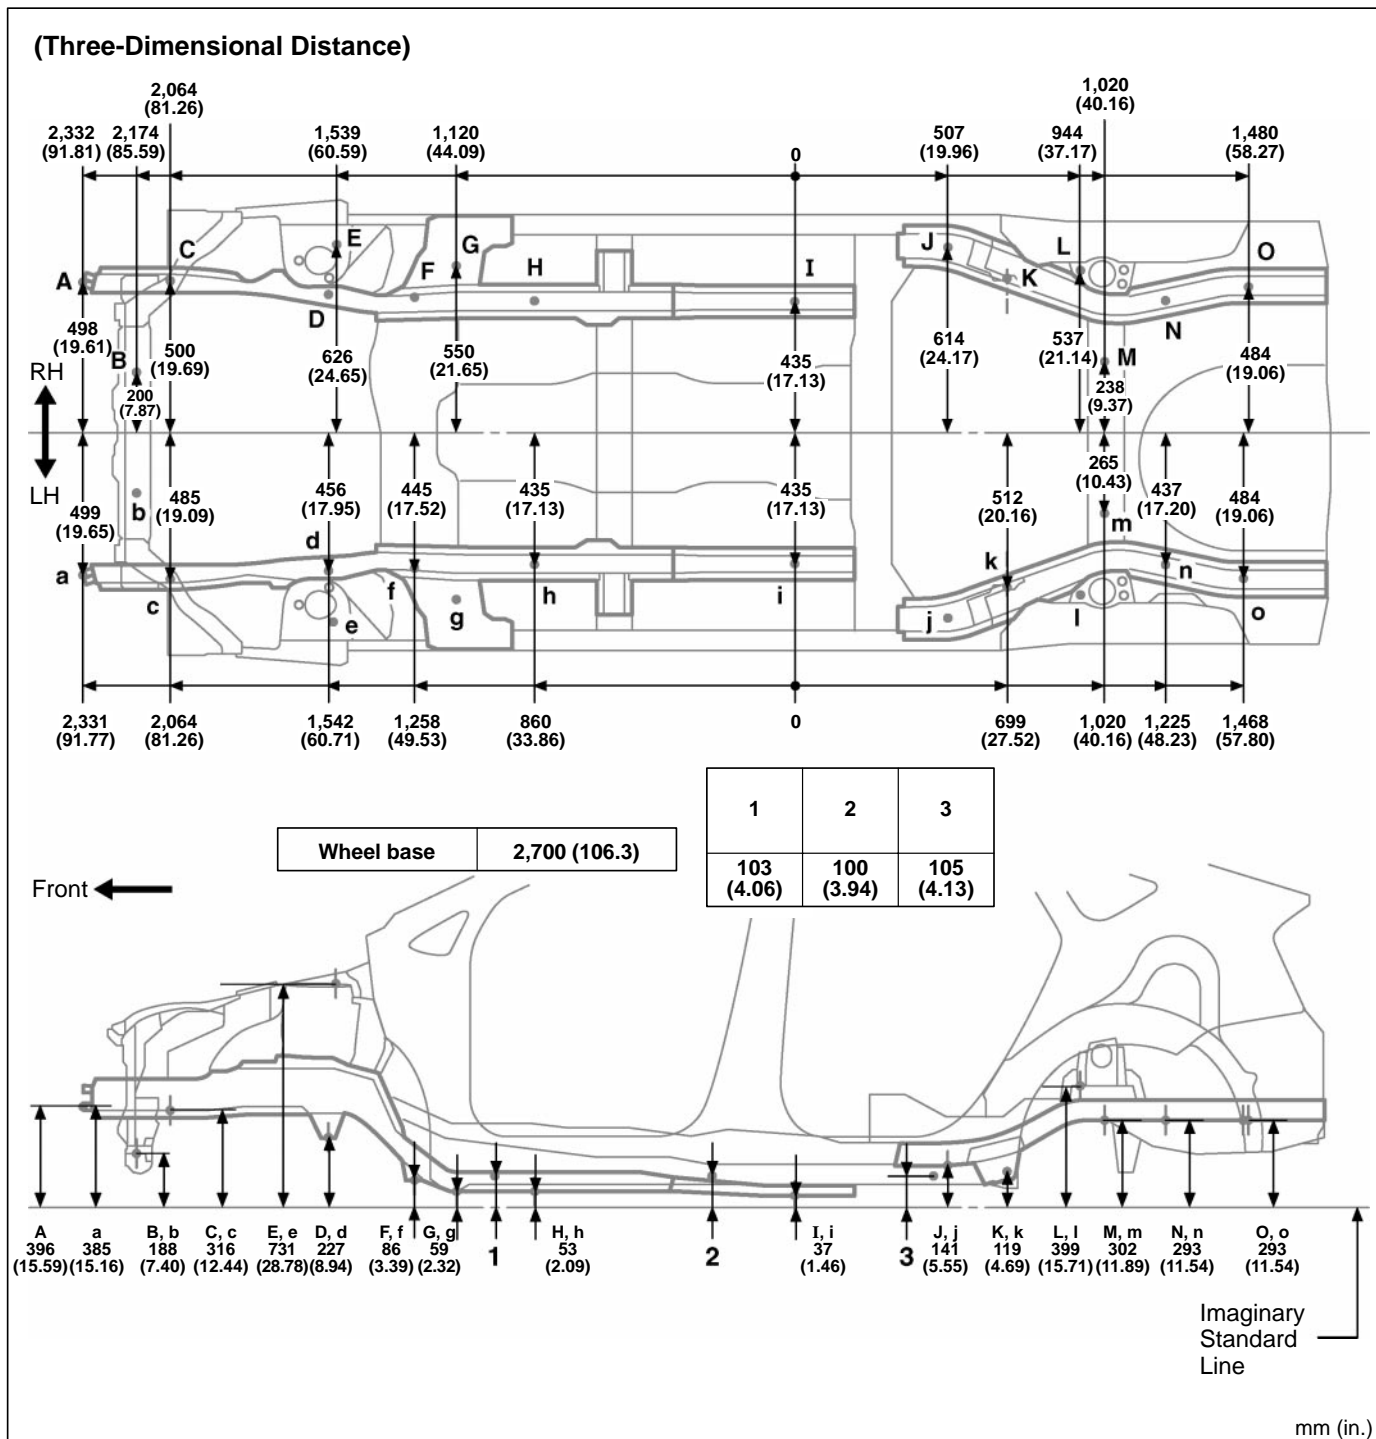

Symbol	Name	Hole dia.	Symbol	Name	Hole dia.
A, a	Front bumper reinforcement installation bolt	8 (0.31) bolt	I, i	Center member floor No.5 reinforcement standard hole	10 (0.39)
B, b	Radiator lower support standard hole	10 (0.39)	J, j	Rear floor side member standard hole	25 (0.98)
C, c	Front side member standard hole	18 (0.71)	K, k	Trailing arm installation hole inner	13 (0.51)
D, d	Front suspension crossmember installation nut	14 (0.55)nut	L, l	Rear spring bracket installation hole-front	12 (0.47)
E, e	Front spring support hole-outer	11 (0.43)	M, m	Rear floor No.2 crossmember standard hole	10 (0.39)
F, f	Front suspension crossmember installation nut	14 (0.55)nut	N, n	Rear floor side member standard hole	16 (0.63)
G, g	Torque box front standard hole	25 (0.98)	O, o	Rear floor side member standard hole	18 (0.71)
H, h	Front side member standard hole	18 (0.71)	—	—	—