



Technical Service BULLETIN

November 23, 2005

Title:

FRONT LICENSE PLATE INSTALLATION DURING PDS

Models:

'06 RAV4

P083-05

PRE-DELIVERY SERVICE

Introduction Follow the procedure below to install the front license plate on 2006 model year RAV4 vehicles.

Applicable Vehicles

- **2006** model year **RAV4** vehicles.

Parts Information


PREVIOUS PART NUMBER	CURRENT PART NUMBER	PART NAME	QTY
00473-00001	Same	Kit, Self-tapping Screw	1

Installation Procedure

1. Align the installation holes of the front license plate with the dimples of the front bumper.
2. Install two (2) self-tapping screws through the license plate and into the front bumper at the dimples.

NOTE:


- Do **NOT** drill holes into the bumper.
- Do **NOT** overtighten the screws.

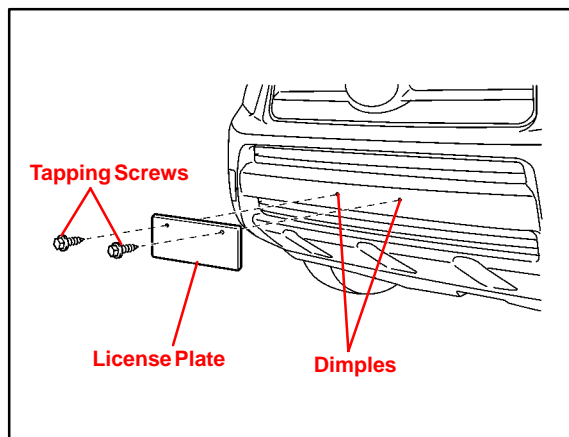

Use self-tapping screws of a non-corroding type with the following dimensions:

Nominal Length: 15.0 – 20.0 mm
(0.59 – 0.79 in.)

Diameter: 6.0 mm (0.24 in.)

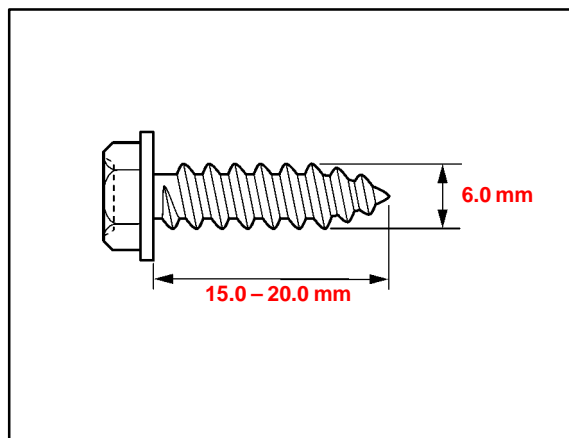

Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—



Toyota Supports ASE Certification