



Technical Service BULLETIN

December 1, 2000

Title:

FRONT LICENSE PLATE INSTALLATION

Models:

'01 RAV4

PG026-00

PRODUCT GENERAL INFORMATION

Introduction The following procedure is recommended for the front license plate installation on the 2001 model year RAV4.

Applicable Vehicles

- 2001 model year **RAV4** vehicles.

Repair Procedure

1. Align the installation holes of the front license plate with the dimples on the front bumper.

NOTE:


Do NOT pre-drill holes in the dimples.

2. Using two self-tapping screws, install the front license plate on the front bumper.


3. Use self-tapping screws of a non-corroding type having the following dimensions:

Nominal Length (L):
15.0 – 20.0 mm (0.59 – 0.79 in.)

Diameter (D):
6.0 mm (0.24 in.)

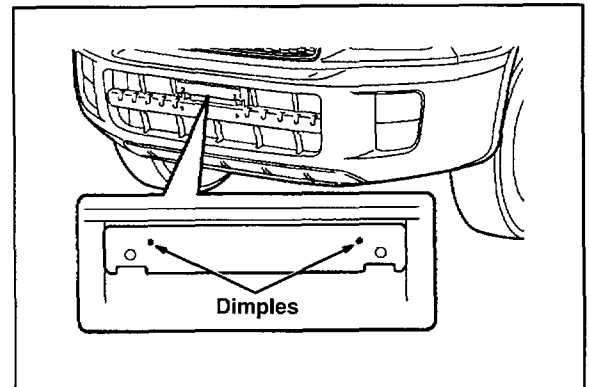

Recommended Self-Tapping Screw

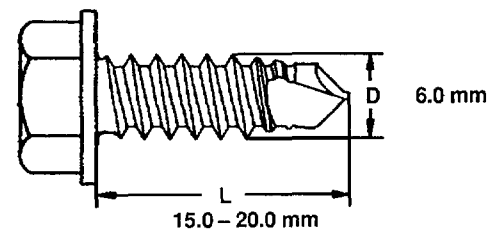

Warranty Information

OP CODE	DESCRIPTION	TIME	OPN	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—



Toyota Supports ASE Certification

Index * 054467