



## ■ CHARGING SYSTEM

### 1. General


- A compact and lightweight segment conductor type generator that generates high amperage output in a highly efficient manner is standard equipment.
- This generator has a joined segment conductor system in which multiple segment conductors are welded together to form the stator. Compared to the conventional winding system, the electrical resistance is reduced due to the shape of the segment conductors, and their arrangement helps to make the generator compact.

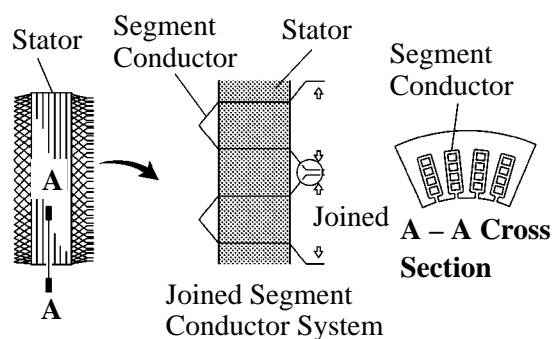

**Segment Conductor  
Type Generator**

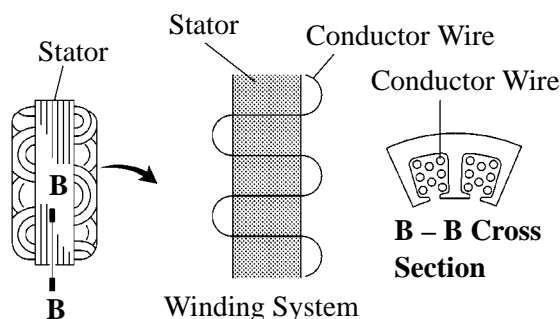

**Conventional Type Generator**

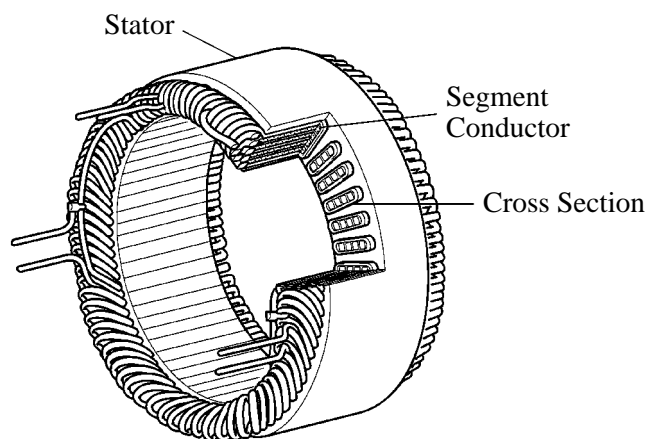

**Stator of Segment Conductor  
Type Generator**

### ► Specifications ◀


Type	SC1*1	SC2*2	SC6L*3
Rated Voltage	12 V	←	←
Rated Output	130 A	150 A	180 A
Initial Output Starting Speed	Max. 1,500 rpm	←	Max. 1,000 rpm

\*1: Standard for SR5 Grade

\*2: Models with Seat Heater or RSES (Rear Seat Entertainment System) (without Towing Package)


\*3: Models with Towing Package

### ► Wiring Diagram ◀

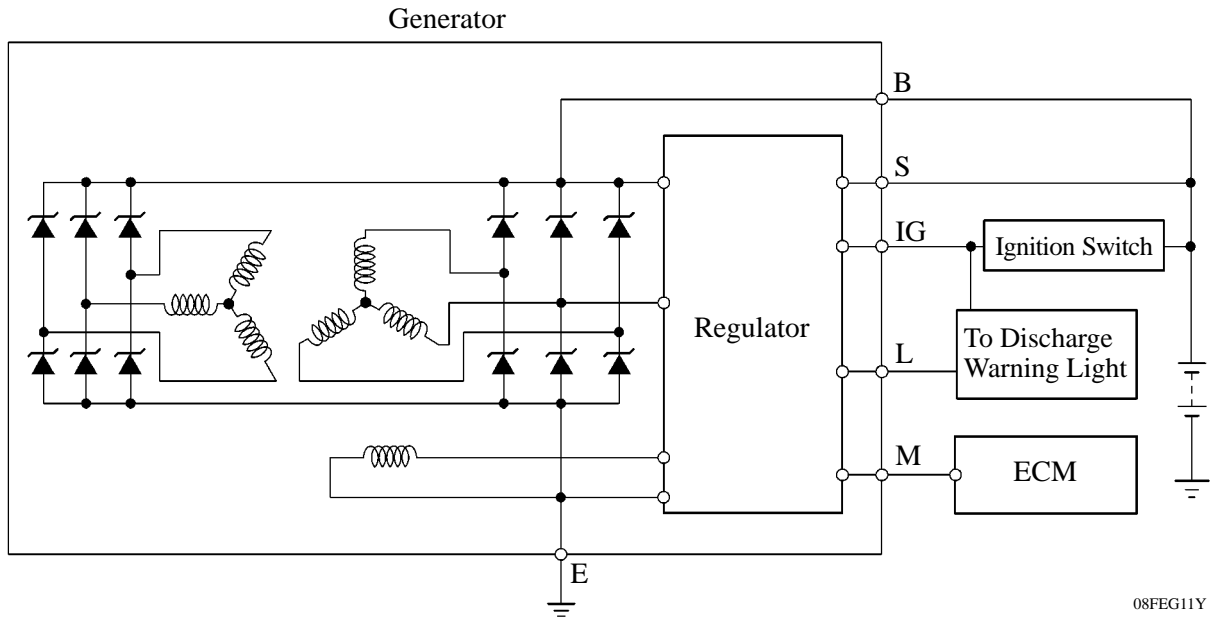


## 2. Dual Winding System

A dual winding system is used. This system consists of two sets of three-phase windings whose phases are staggered  $30^\circ$ . This system results in the reduction of both electrical noise (ripple and spike) and magnetic noise (a hum that is heard as generator load is increased). This system significantly suppresses noise at the source (generator). Because the waves that the respective windings generate have opposite polarities, magnetic noise is reduced. However, the electrical power generated does not cancel itself out due to the use of separate rectifiers. The opposite polarities that are generated are shown below.

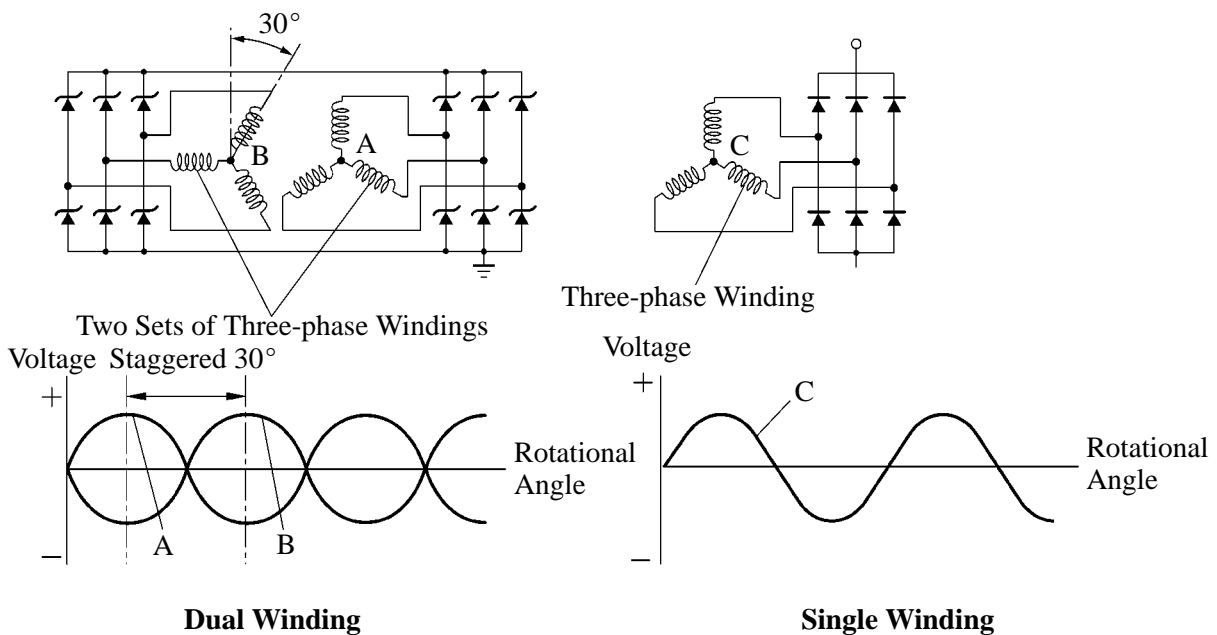

■ STARTING SYSTEM

Planetary reduction type starter is used.

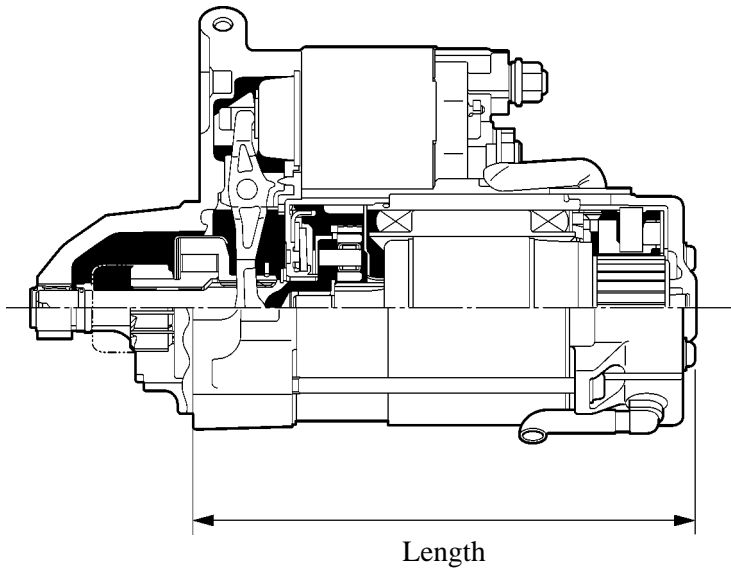

04E1EG43C

► Specification ◀


Type	PA78S
Rated Output	2.0 kW
Rated Voltage	12 V
Length*1	172.35 mm (6.79 in.)
Weight	4300 g (9.5 lb)
Rotating Direction	Clockwise*2

\*1: Length from the mounted area to the rear end of the starter

\*2: Viewed from Pinion Side

## ■ SERPENTINE BELT DRIVE SYSTEM

- A serpentine belt drive system, which drives all accessory components by a single V-ribbed belt, is used. It reduces the overall engine length, weight and the number of engine parts.
- An automatic tensioner is used. This makes the tension adjustment unnecessary.

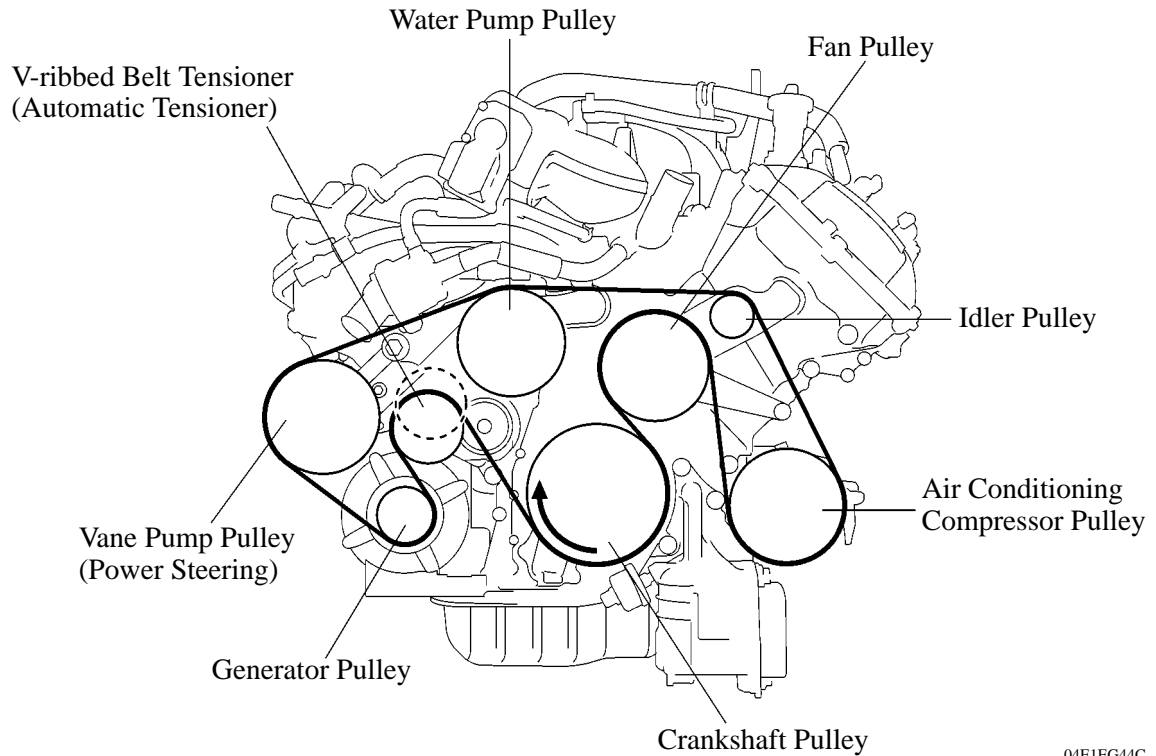

04E1EG44C