

DTC	B1167/85	SHORT IN CURTAIN SHIELD SQUIB (LH) CIRCUIT (TO GROUND)
-----	----------	--

CIRCUIT DESCRIPTION

The curtain shield squib (LH) circuit consists of the airbag sensor assy center and curtain shield airbag assy (LH).

It causes the SRS to deploy when the SRS deployment conditions are satisfied.

DTC B1166/88 is recorded when an open is detected in the curtain shield squib (LH) circuit.


DTC No.	DTC Detecting Condition	Trouble Area
B1167/85	<ul style="list-style-type: none"><li>• Short circuit in curtain shield squib (LH) wire harness (to ground)</li><li>• Curtain shield squib (LH) malfunction</li><li>• Airbag sensor assy malfunction</li></ul>	<ul style="list-style-type: none"><li>• Curtain shield airbag assy (LH)</li><li>• Airbag sensor assy center</li><li>• Floor wire No. 2</li></ul>

WIRING DIAGRAM

See page 05-530.

INSPECTION PROCEDURE

1	CHECK CURTAIN SHIELD SQUIB (LH) CIRCUIT
---	---

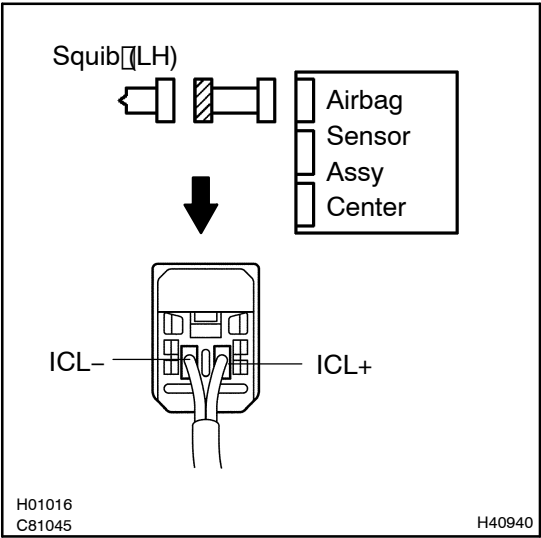

- (a) Disconnect the negative (-) terminal cable from the battery, and wait at least for 90 seconds.
- (b) Disconnect the connectors between the airbag sensor assy center and curtain shield airbag assy (LH).
- (c) For the connector (on the curtain shield airbag assy side) between the curtain shield airbag assy and the airbag sensor assy center, measure the resistance between ICL+ and body ground.


OK:  
Resistance: 1 MΩ or Higher

NG	REPAIR OR REPLACE FLOOR WIRE NO.2
----	-----------------------------------

OK

## 2 CHECK AIR BAG SENSOR ASSY CENTER

SST 09843-18040

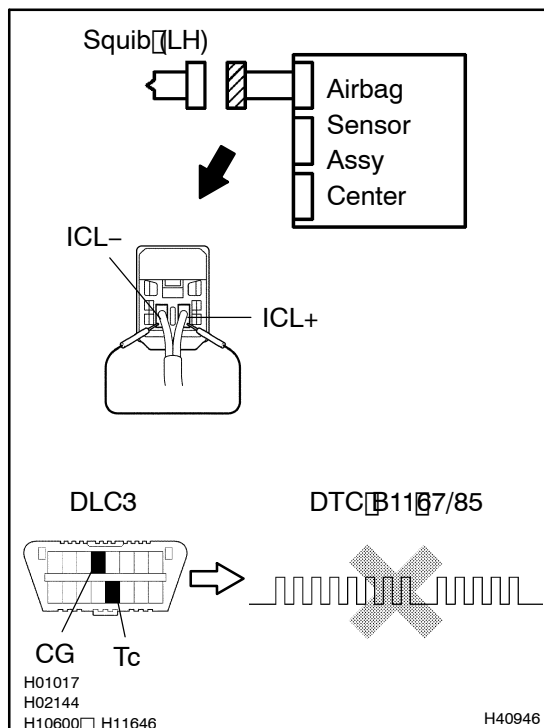

- Connect the connector to the airbag sensor assy center.
- Using a service wire, connect ICL+ and ICL- of the connector (on the curtain shield airbag assy side) between the curtain shield airbag assy (LH) and the airbag sensor assy center.
- Connect the negative (-) terminal cable to the battery, and wait at least for 2 seconds.
- Turn the ignition switch to ON, and wait at least for 20 seconds.
- Clear the DTC stored in memory (See page 05-403).
- Turn the ignition switch to LOCK, and wait at least for 20 seconds.
- Turn the ignition switch to ON, and wait at least for 20 seconds.
- Check the DTC (See page 05-403).


**OK:****DTC B1167/85 is not output.****HINT:**

Codes other than code B1167/85 may be output at this time, but they are not relevant to this check.

**NG****REPLACE AIR BAG SENSOR ASSY CENTER****OK**

**3 CHECK CURTAIN SHIELD SQUIB (LH)**

SST 09843-18040

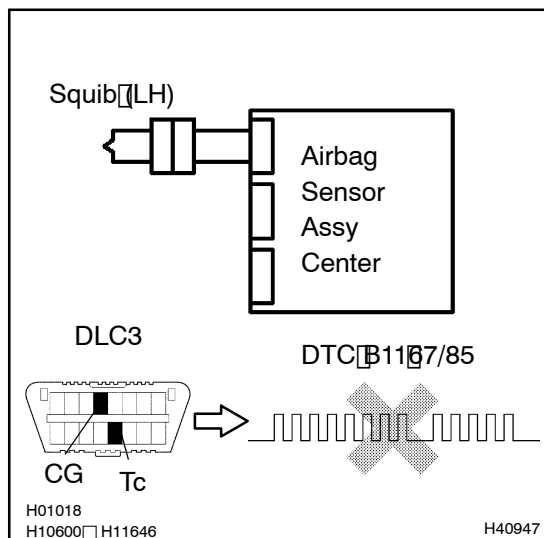

- Turn the Ignition switch to LOCK.
- Disconnect the negative (-) terminal cable from the battery, and wait at least for 90 seconds.
- Connect the curtain shield airbag Assy (LH) connector.
- Connect the negative (-) terminal cable to the battery, and wait at least for 2 seconds.
- Turn the Ignition switch to ON, and wait at least for 20 seconds.
- Clear the DTC stored in memory (See page 05-403).
- Turn the ignition switch to LOCK, and wait at least for 20 seconds.
- Turn the ignition switch to ON, and wait at least for 20 seconds.
- Check the DTC (See page 05-403).

**OK:****DTC B1167/85 is not output.****HINT:**

Codes other than code B1167/85 may be output at this time, but they are not relevant to this check.

**NG****REPLACE CURTAIN SHIELD AIR BAG ASSY LH****OK****4 USE SIMULATION METHOD TO CHECK****NG****Go to step 1****OK****REPLACE ALL SRS COMPONENTS INCLUDING THE WIRE HARNESS**